

EVO HYDE 550

GENERAL

EVO HYDE 550 DARK
 Article number: 10250150
 Category: surface
 Light source: LED
 Color changing: no
 Warranty: 5 years

DIMENSIONS

Length: 556 mm / 21.89"
 Width: 16 mm / 0.63"
 Height: 22 mm / 0.87"
 Diameter: -
 Total height: -
 Recess depth: -

ELECTRONICS

Voltage: 12V AC
 Output: 2.00 Watt
 VA: 2.10
 Power factor: 0.95
 Light source: 45x SMD-LED 0.06W
 Lifetime: 25000 hours
 Energy label: A+
 Dimmable: no
 Length of cable lead: 24" / 600 mm

LIGHT SPECIFICATIONS

Color temperature: 2950 K
 CRI (RA): 96
 Luminous intensity: 61.30 Cd
 Light beam 0-180: 62°
 Light beam 90-270: 92°
 Net luminous flux: 91 lumen
 Luminous efficiency: 46 lumenwatt

MATERIAL

Ring Plate: -
 Lens: acrylic (PMMA)
 Exterior: aluminum
 Easy Lock included: yes
 Installation hardware included: yes

AVAILABLE PRODUCT COLORS

■ Dark




AVAILABLE ACCESSORIES

FIX 5

PROTECTION RATING

IP : 53

Distance		Light circle 0-180°		Light circle 90-270°		Illuminance [lux]
[m]	[ft]	[m]	[ft]	[m]	[ft]	
0.75	2.46	0.90	2.96	1.55	5.10	108.98
1.50	4.92	1.80	5.91	3.11	10.19	27.24
2.25	7.38	2.70	8.87	4.66	15.29	12.11
3.00	9.84	3.61	11.83	6.21	20.38	6.81
3.75	12.30	4.51	14.78	7.77	25.48	4.36
4.50	14.76	5.41	17.74	9.32	30.58	3.03
0.30	1.00	0.37	1.20	0.63	2.07	663.31

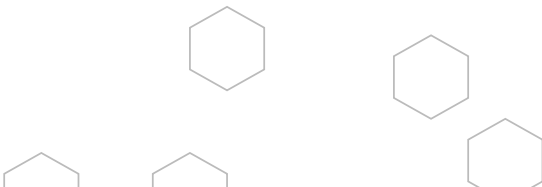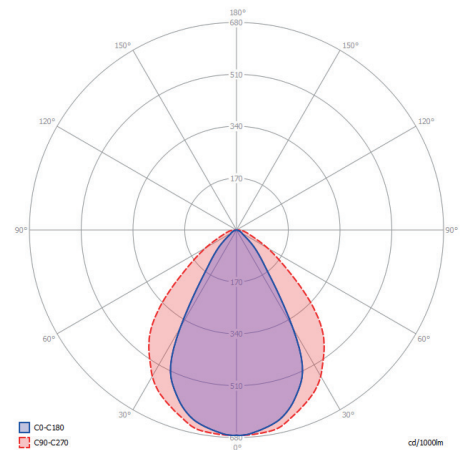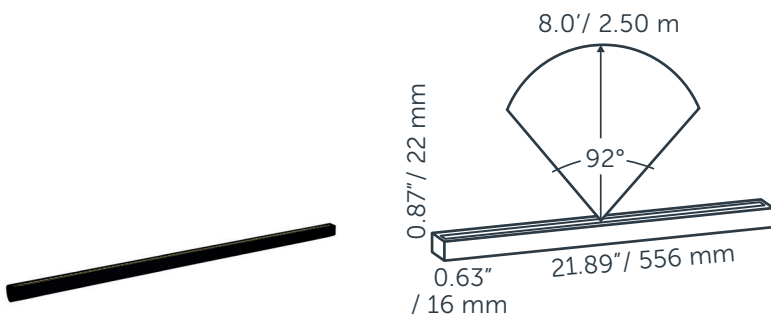

in-lite®

12 volt

